

PRIME 2 - 1,5 kW











Cod. GC-1200-PR-V




Two-cylinder oil-free compressor, 1,360 rpm, flow rate 170 l/min@5 bar, maximum absorption 7 A. Maximum pressure up to 8 bar, maximum silence. Can also be used for intensive use.

Also available in the version:

- 110V-60Hz and 220V-60Hz
- three-phase 400V 50/60Hz
- with UL 220V - 60Hz and 110V - 60Hz electric motors

Cod.	 Air capacity	 FAD Fad @ 5bar	 Motor	 Voltage Hz	 Noise Level	 RPM	 Duty Cycle	 max P.	 Size	 net Weight
PRIME 2 - 230/50 GC-1200-PR-V	m³/min/l/min 0.24 240	m³/min l/min 0.17 170	kW 1.5	230V 50Hz	db(A) 66	1360	70 %	bar 8	mm 500X350X270	Kg 25
PRIME 2 - 1,5 KW 220 V-60 HZ GC-1200-PR-60-V	m³/min/l/min 0.28 280	m³/min l/min 0.17 170	kW 1.5	220V 60Hz	db(A) 66	1760	70 %	bar 8	mm 500X350X270	Kg 25
PRIME 2 - 1,5 KW 400 V-50/60 HZ GC-1200-PR-400-V	m³/min/l/min 0.24 240	m³/min l/min 1.47 1470	kW 1.5	400V 50/60Hz	db(A) 66	1470	70 %	bar 8	mm 500X350X270	Kg 25
PRIME 2 VERSIONE UL - 1,5 KW 220 V - 60 HZ GC-1200-PR-60-UL-V	m³/min/l/min 0.28 280	m³/min l/min 0.17 170	kW 1.5	220V 60Hz	db(A) 66	1700	70 %	bar 8	mm 500X350X270	Kg 25
PRIME 2 VERSIONE UL - 1,5 KW 110 V-60 HZ GC-1200-PR-110-UL-V	m³/min/l/min 0.28 280	m³/min l/min 0.185 185	kW 1.5	110V 60Hz	db(A) 66	1700	70 %	bar 8	mm 500X350X270	Kg 25

Air delivery performance

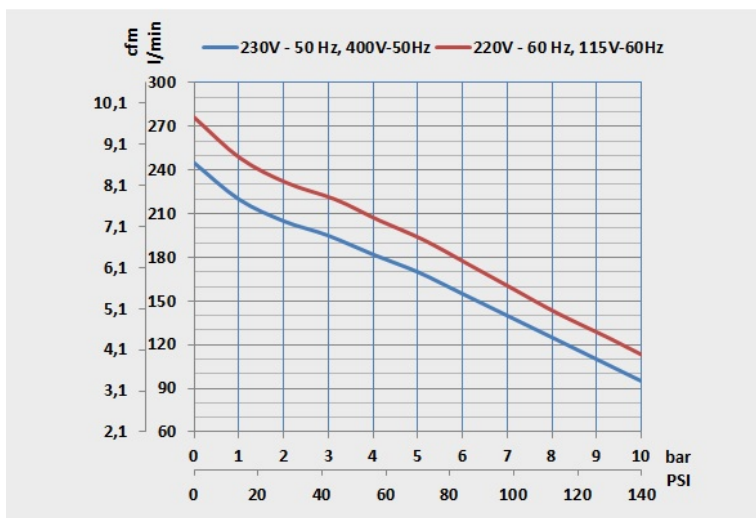

Maintenance kits

Kit.	Description	Type	Hours
TA-FL-058-K	Complete PRIME filter Suction filter for PRIME compressors. The kit consists of a suction cartridge.	Ordinary	1.000h/1y
PR-GC-031-K-SCP	PRIME 2 Extraordinary maintenance spare parts kit PRIME 1.5 kW (PRIME 2) versions. comprehends: <ul style="list-style-type: none"> • 2 suction filters, code: TA-FL-058-C • 4 O-rings, code: MA-PC018 • 2 piston rings , code: MA-MG00001 • 2 piston guide rings, code: MA-MG00003 • 2 expansion rings for the segments, code: MA-MG00024 • 2 complete valve plates, code: MA-MG-02002P-C-P • 1 non-return valve pads, code: CO-PV-001 The extraordinary maintenance intervals recommended for this compressor are 4000 hours/4 years.	Extraordinary	4.000h/4y